

DCM Test Report

Cable Type : 4x2x23 x PE/LSZH	Factory Number : PHOENIX	Data File Name : DA170807.D3S
Cable I.D. : U/UTP#23X4P CABLE	Order Number : 6091 VI-15 250640241	Specification File : CAT 6A-305M.S3S
Temperature : 25.00 °C	Relative Humidity : 50 %	Test Date/Time : 06/06/2025 02:15:41 AM
Length : 305.00 m	Number of Pairs to Test : 4	Operator : L B2025060500028/604/R1
Starting Position : 5		Analyzer Type : ENA

Pass - Fail Test Certificate - 4 Pairs

High Frequency

Test Type	Test Result
Input Impedance (Zin)(Ohms)(Terminated)	OK
Return Loss (RL)(dB)	OK
Return Loss (RL-Far End)(dB)	OK
Insertion Loss (IL)(Curve Fit)(dB/100.0 m)@20C	OK
Near End Crosstalk Loss (NEXT)(dB)	OK
Power Sum NEXT(PSNEXT)(dB)	OK

Low Frequency

Test Type	Test Result
Conductor Resistance(Ohms/100.0 m)@20C	OK
Resistance Unbalance(%)	OK
Mutual Capacitance(nF/100.0 m)@1000Hz	OK
Cap. Unbalance to Ground(pF/100.0 m)@1000Hz	OK

Signature:	Approved:	Date:
------------	-----------	-------





DCM Test Report



Cable Type : 4x2x23 x PE/LSZH	Factory Number : PHOENIX	Data File Name : DA170807.D3S
Cable I.D. : U/UTP#23X4P CABLE	Order Number : 6091 VI-15 250640241	Specification File : CAT 6A-305M.S3S
Temperature : 25.00 °C	Relative Humidity : 50 %	Test Date/Time : 06/06/2025 02:15:41 AM
Length : 305.00 m	Number of Pairs to Test : 4	Operator : L B2025060500028/604/R1
Starting Position : 5		Analyzer Type : ENA

Worst Case Summary

High Frequency

Test Type	Specification	Measured (Pair)	Margin	@ Frequency (MHz)	Test Result
Input Impedance (Zin)(Terminated)	85.00 (Min)	97.15 (Pair 2)	12.15	62.95	Passed
Input Impedance (Zin)(Terminated)	115.00 (Max)	109.54 (Pair 4)	5.46	1.06	Passed
Return Loss (RL)	20.2 (Min)	25.4 (Pair 4)	5.2	1.08	Passed
Return Loss (RL-Far End)	20.2 (Min)	24.7 (Pair 4)	4.5	1.08	Passed
Insertion Loss (IL)(Curve Fit)@20C	2.82 (Max)	2.53 (Pair 1)	0.29	2.09	Passed
Near End Crosstalk Loss (NEXT)	37.2 (Min)	48.6 (Pairs 2-3)	11.4	296.86	Passed
Power Sum NEXT(PSNEXT)	35.2 (Min)	48.0 (Pair 2)	12.8	296.86	Passed

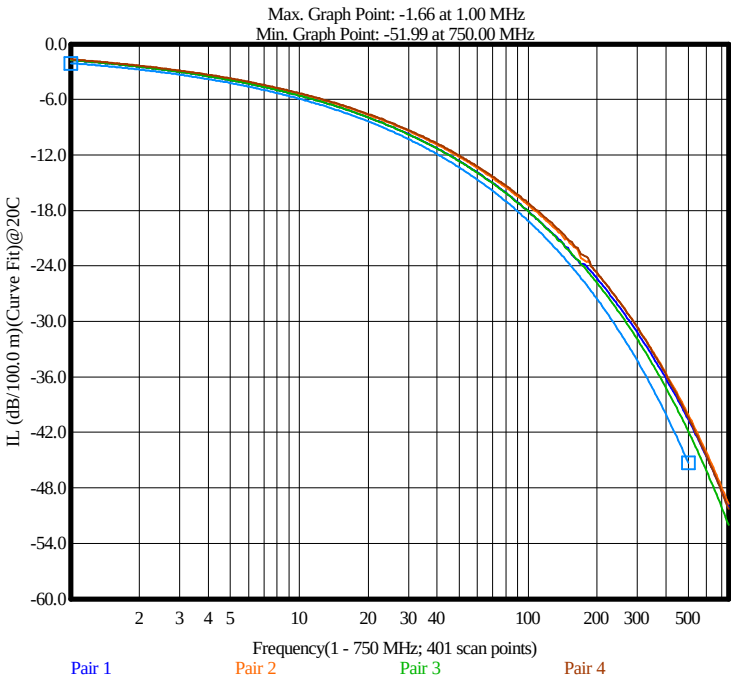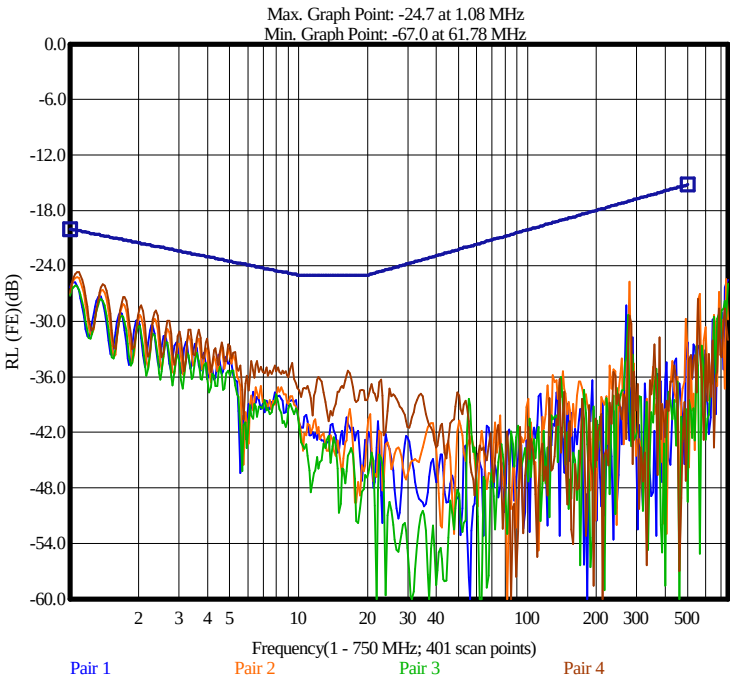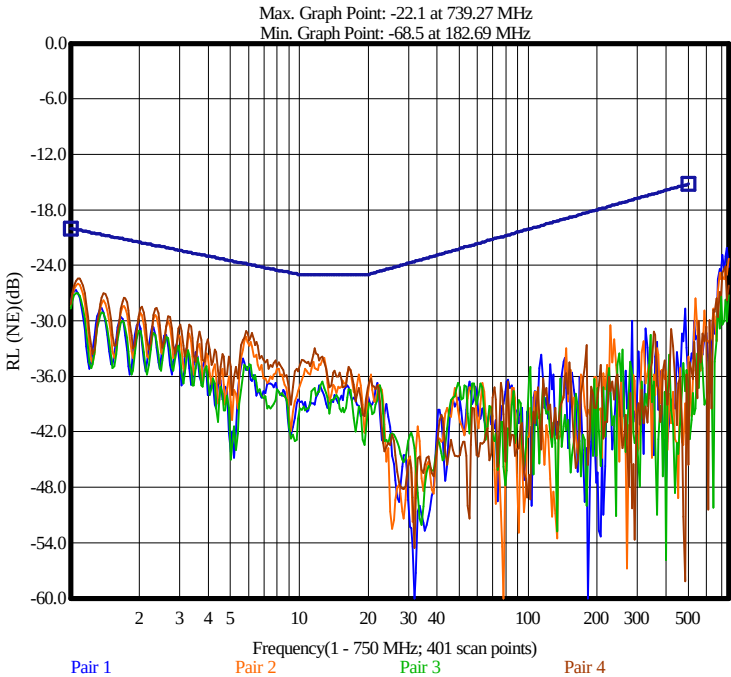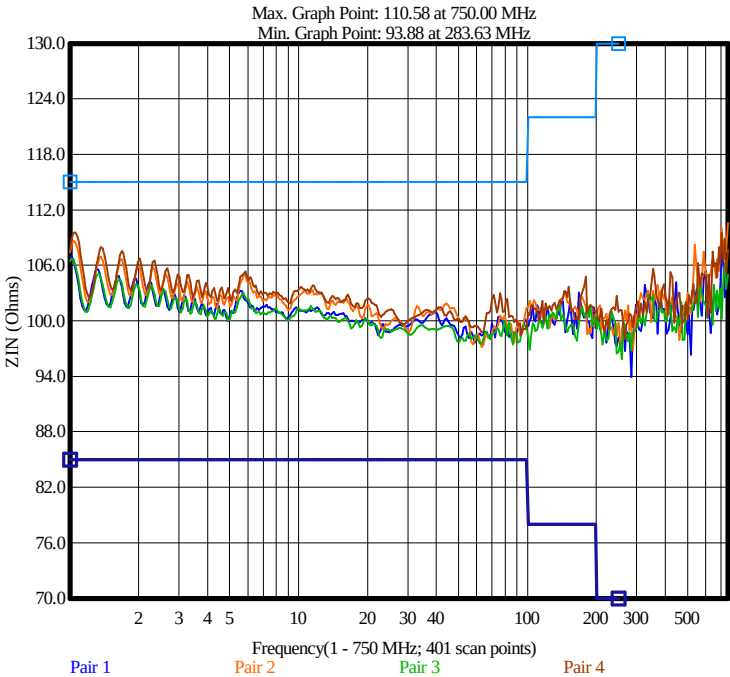

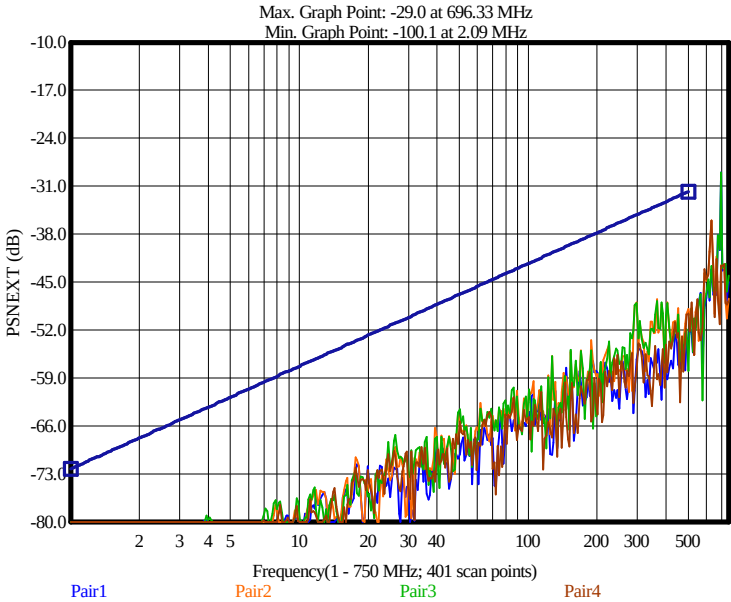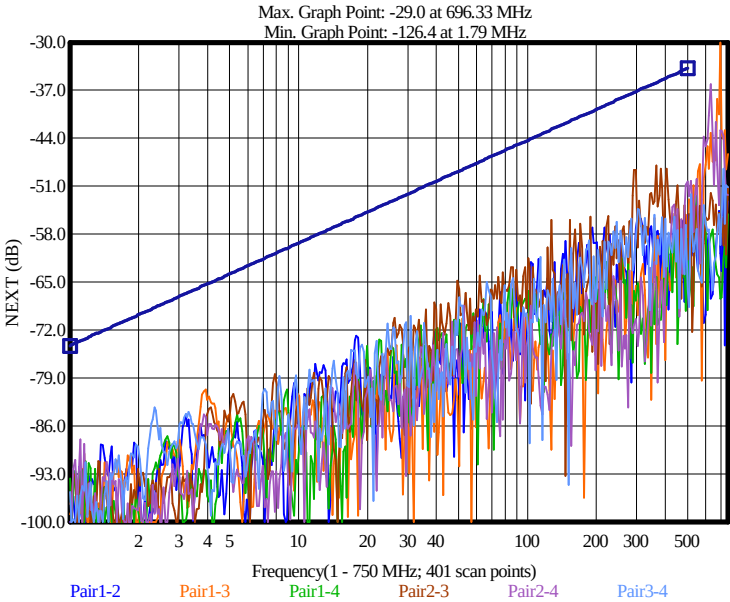

N/A = Not Applicable.
--- = Disable/Bypassed Pair.

* = Measured value out of spec.
xxx = No entry.

*** = Measured value is invalid.

Worst Case Summary

Low Frequency





Statistical Parameter	Maximum		Minimum		Average Maximum		Standard Deviation		
Test Type	Spec Limit	Measured	Spec Limit	Measured	Spec Limit	Measured	Spec Limit	Measured	Result
Conductor Resistance(Ohms/100.0 m)@20C	9.38	7.28	xxx	6.98	xxx	7.12	xxx	0.117	Passed
Resistance Unbalance(%)	5.00	0.95	xxx	0.18	xxx	0.54	xxx	0.283	Passed
Mutual Capacitance(nF/100.0 m)@1000Hz	5.60	5.37	xxx	5.10	xxx	5.24	xxx	0.112	Passed
Cap. Unbalance to Ground(pF/100.0 m)@1000Hz	330.00	15.38	xxx	2.23	xxx	7.91	xxx	5.263	Passed

Detail: Resistance/Capacitance Measurement -Normalized

Test Types	Conductor Resistance Ra @20C	Conductor Resistance Rb @20C	Resistance Unbalance	Mutual Capacitance @1000 Hz	Capacitance Unbalance to Ground @1000 Hz	Test Result
Unit	Ohms/100.0 m	Ohms/100.0 m	%	nF/100.0 m	pF/100.0 m	
Max Spec	9.38	9.38	5.00	5.60	330.00	
Min Spec	xxx	xxx	xxx	xxx	xxx	
Pair 1 [5]	7.28	7.27	0.18	5.37	10.27	Passed
Pair 2 [6]	6.99	7.03	0.62	5.16	-2.23	Passed
Pair 3 [7]	7.21	7.18	0.40	5.33	-3.76	Passed
Pair 4 [8]	7.04	6.98	0.95	5.10	-15.38	Passed





Summary and Graphic: Input Impedance (Zin)(Terminated)

Pair	Specification		Measured(Ohms)		Margin (Ohms)		@ Frequency (MHz)		Test Result
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	
Pair 1 [5]	85.00	115.00	97.67	107.01	12.67	7.99	58.76	1.00	Passed
Pair 2 [6]	85.00	115.00	97.15	108.66	12.15	6.34	62.95	1.04	Passed
Pair 3 [7]	85.00	115.00	97.41	106.68	12.41	8.32	86.21	1.02	Passed
Pair 4 [8]	85.00	115.00	98.47	109.54	13.47	5.46	94.21	1.06	Passed

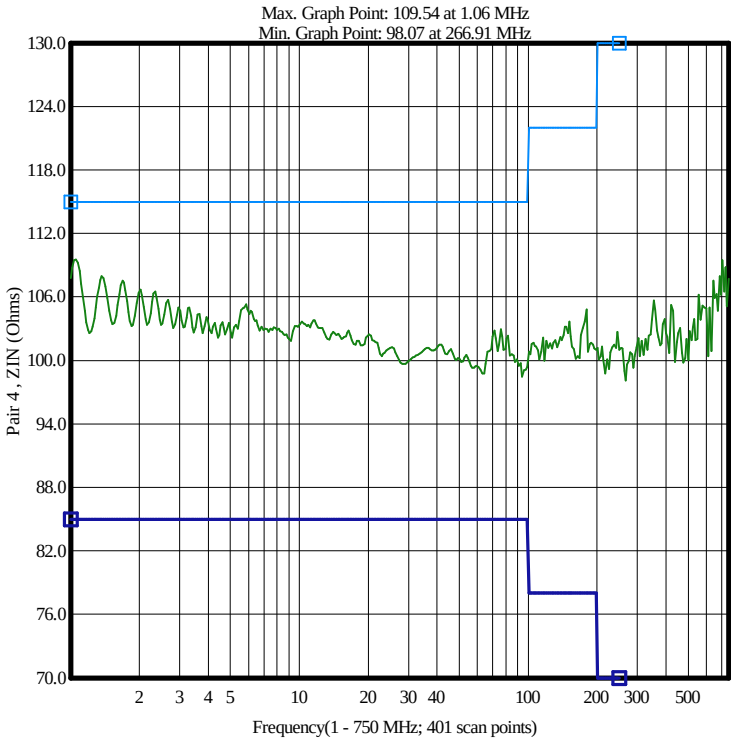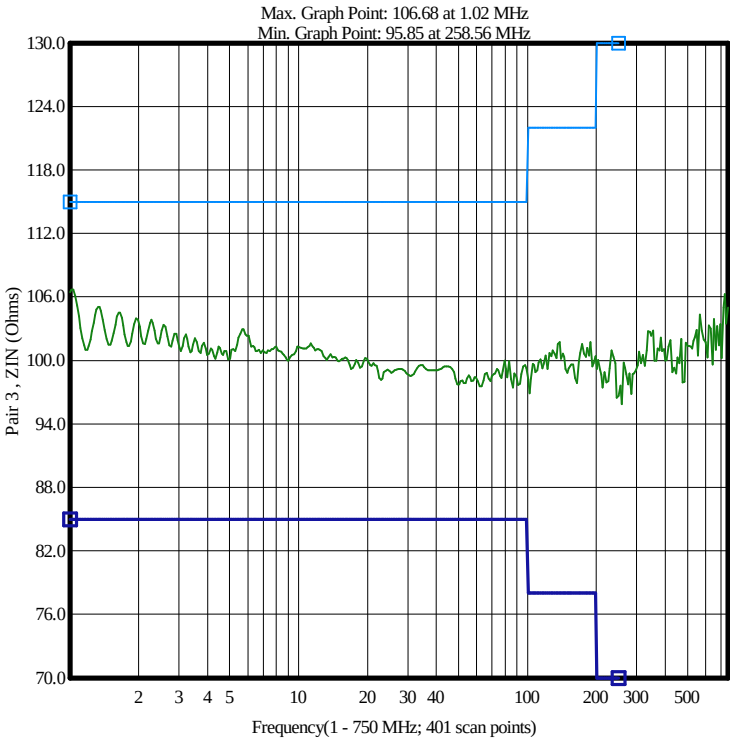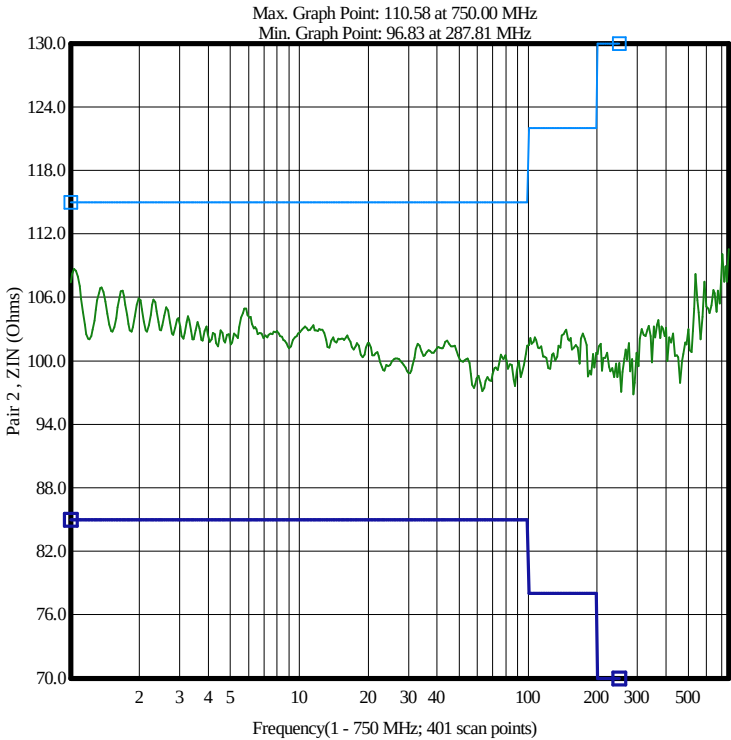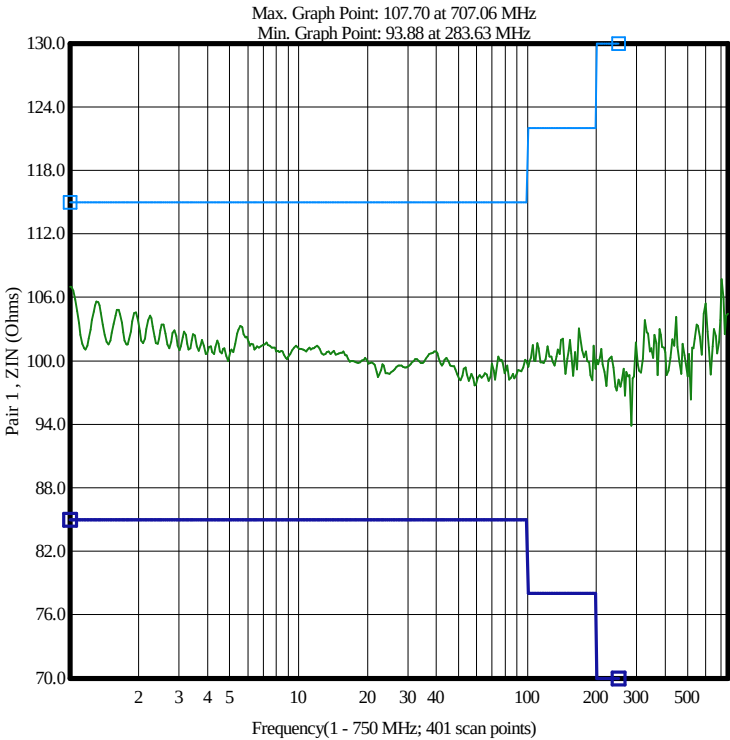





Summary and Graphic: Return Loss (RL)
(Cat 6A): RL >= 20 + 5 * log(f); 25; 25 - 7 * log(f/20)

Pair	Spec (Min)(dB)	Measured(dB)	Margin (dB)	@ Frequency (MHz)	Test Result
Pair 1 [5]	20.1	26.7	6.6	1.06	Passed
Pair 2 [6]	20.2	26.0	5.8	1.08	Passed
Pair 3 [7]	20.2	27.0	6.8	1.08	Passed
Pair 4 [8]	20.2	25.4	5.2	1.08	Passed

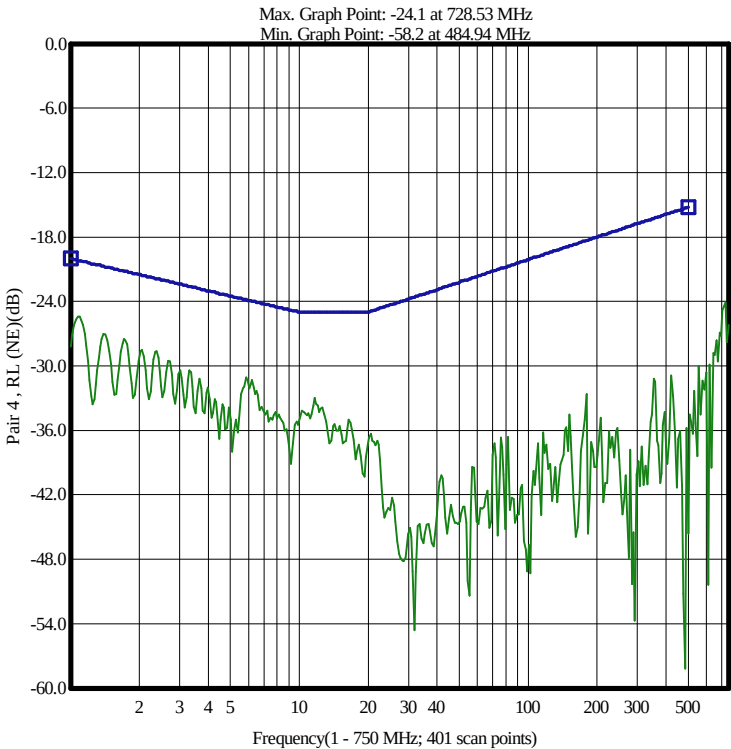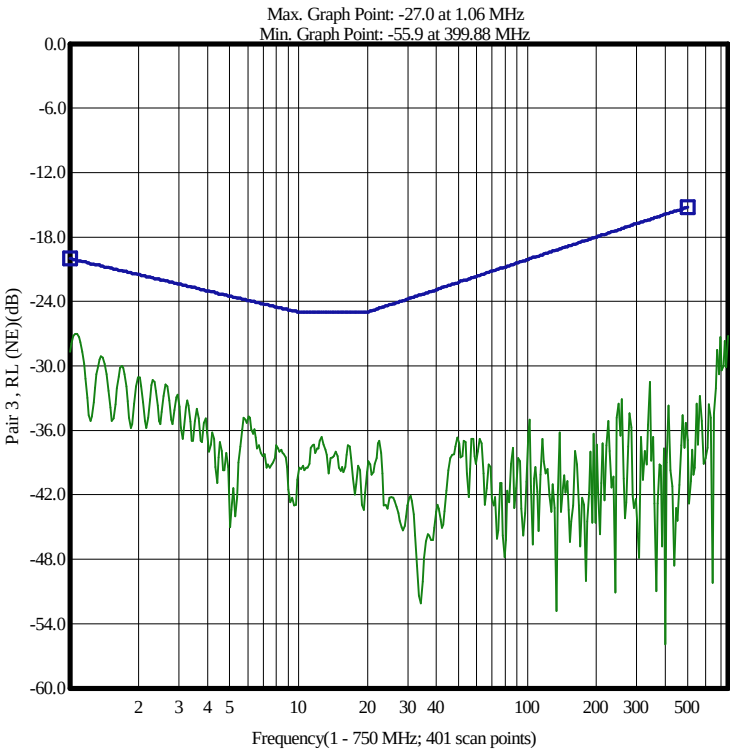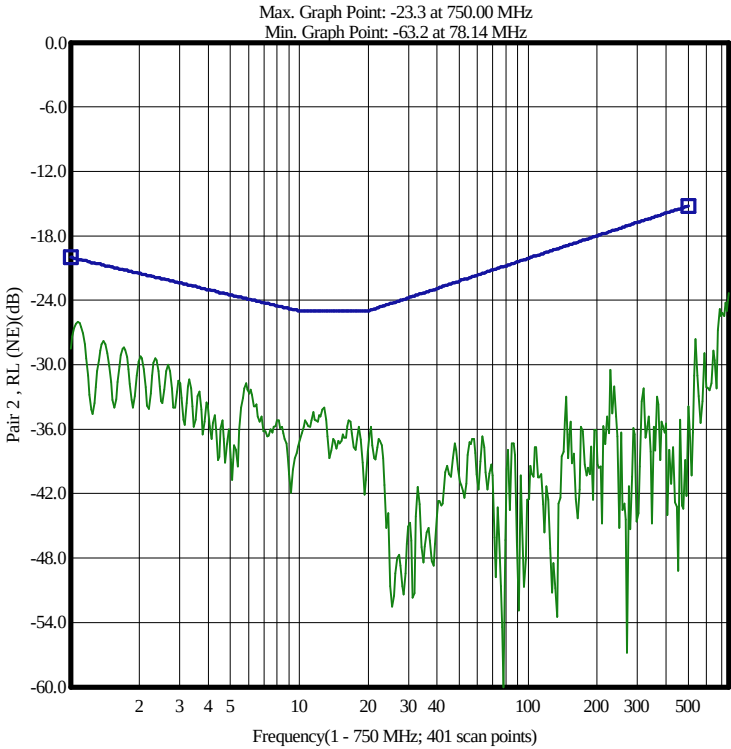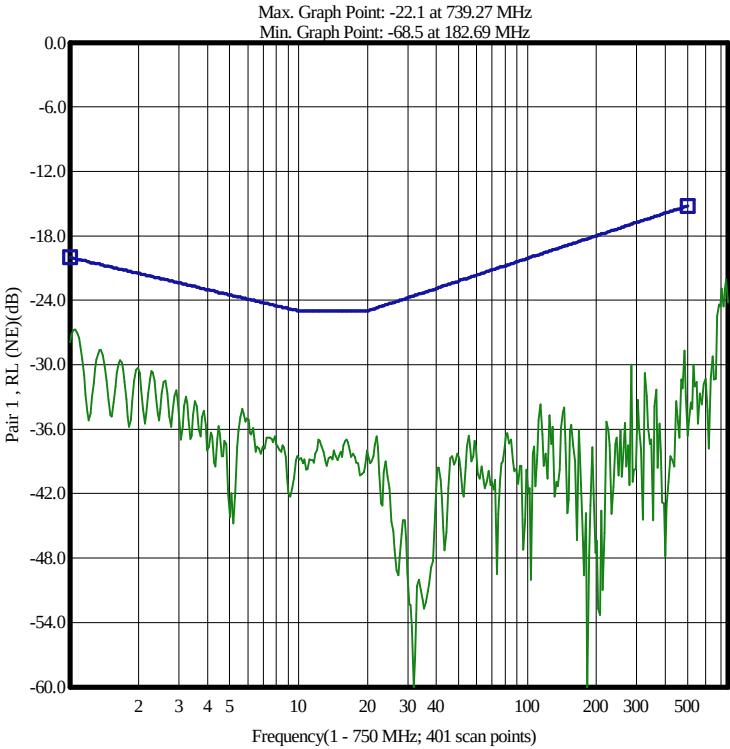

Summary and Graphic: Return Loss (RL_FE)
(Cat 6A): RL >= 20 + 5 * log(f); 25; 25 - 7 * log(f/20)





Pair	Spec (Min)(dB)	Measured(dB)	Margin (dB)	@ Frequency (MHz)	Test Result
Pair 1 [5]	20.1	25.8	5.7	1.04	Passed
Pair 2 [6]	20.2	25.2	5.0	1.08	Passed
Pair 3 [7]	20.1	26.1	6.0	1.06	Passed
Pair 4 [8]	20.2	24.7	4.5	1.08	Passed

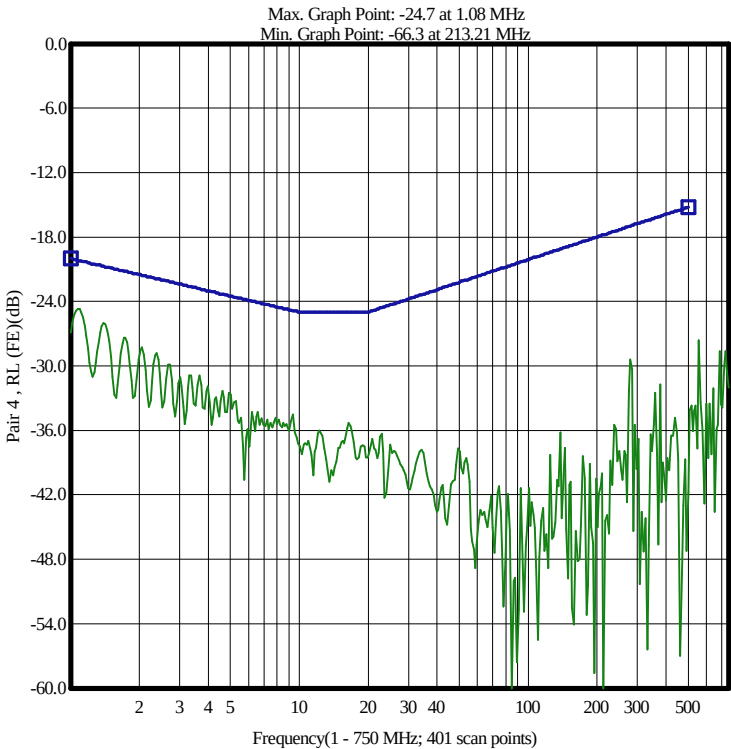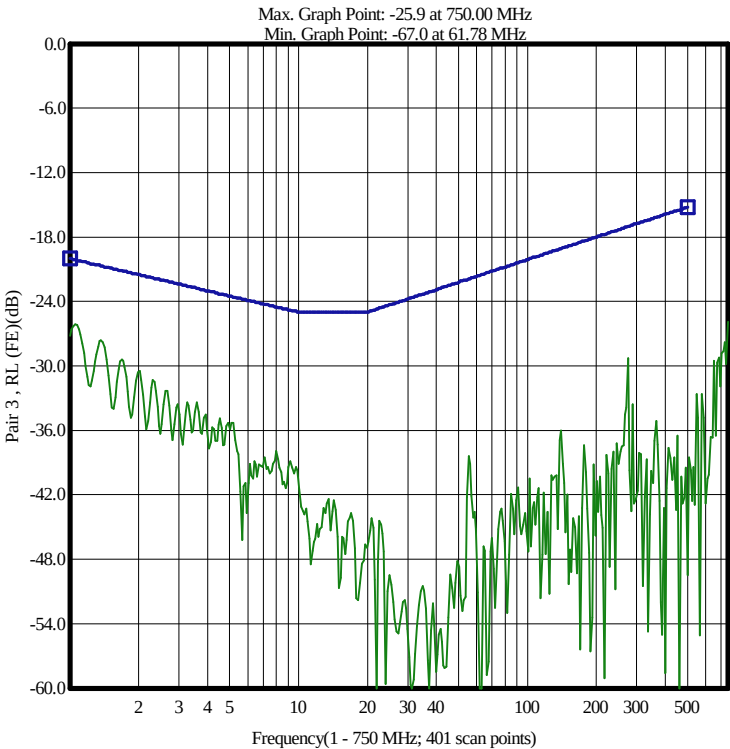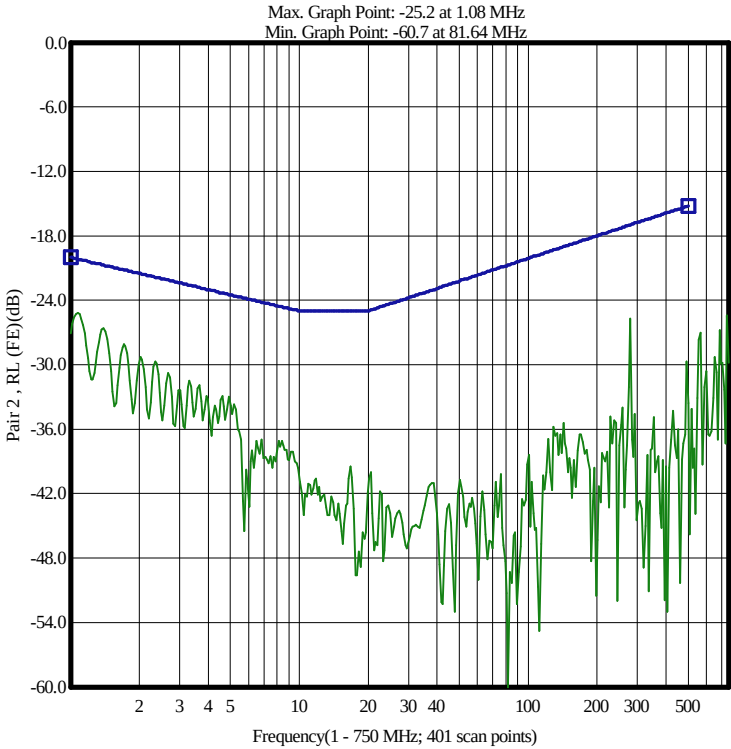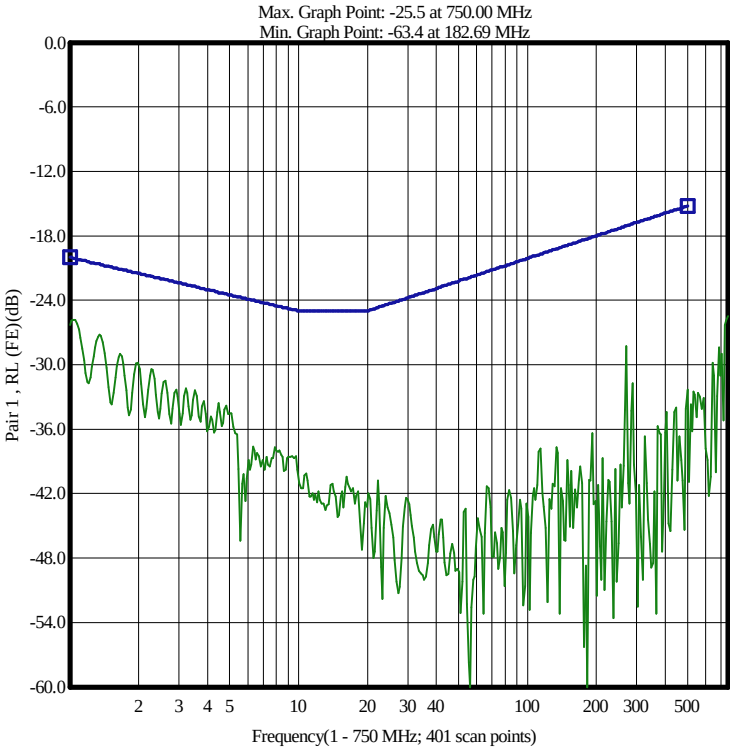

Summary and Graphic: Insertion Loss (IL)(Curve Fit)@20C

(Cat 6A): IL <= 1.82 sqrt(f) + 0.0091 * f + 0.25 / sqrt(f) (Refer to manual)







Pair	Spec (Max)(dB/100.0 m)	Measured(dB/100.0 m)	Margin (dB/100.0 m)	@ Frequency (MHz)	Test Result
Pair 1 [5]	2.82	2.53	0.29	2.09	Passed
Pair 2 [6]	2.55	2.17	0.38	1.66	Passed
Pair 3 [7]	2.71	2.42	0.29	1.91	Passed
Pair 4 [8]	2.09	1.69	0.40	1.02	Passed

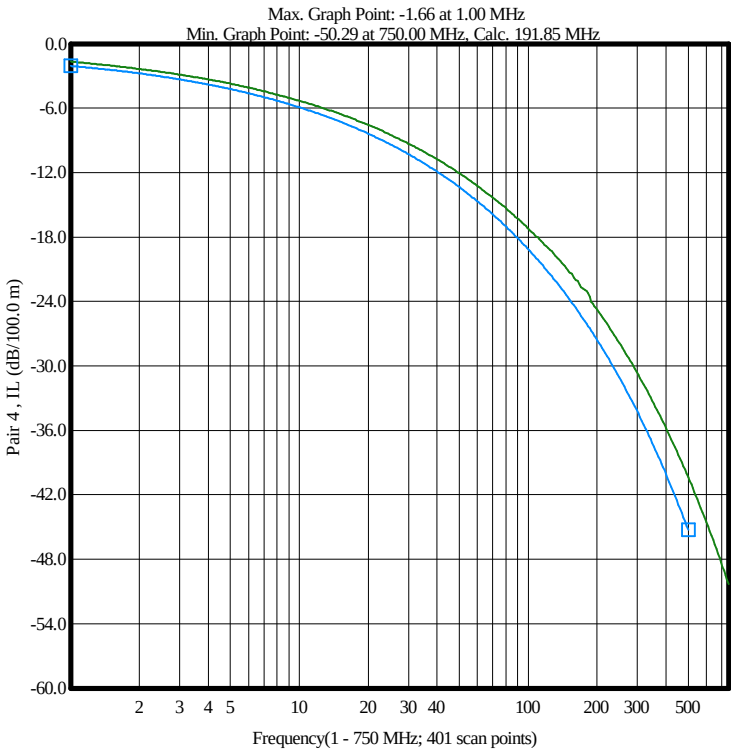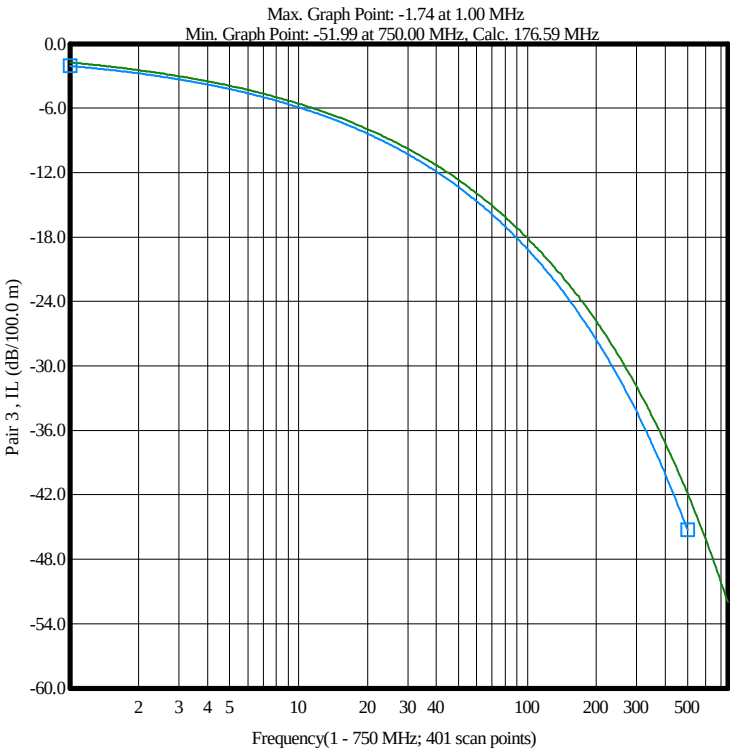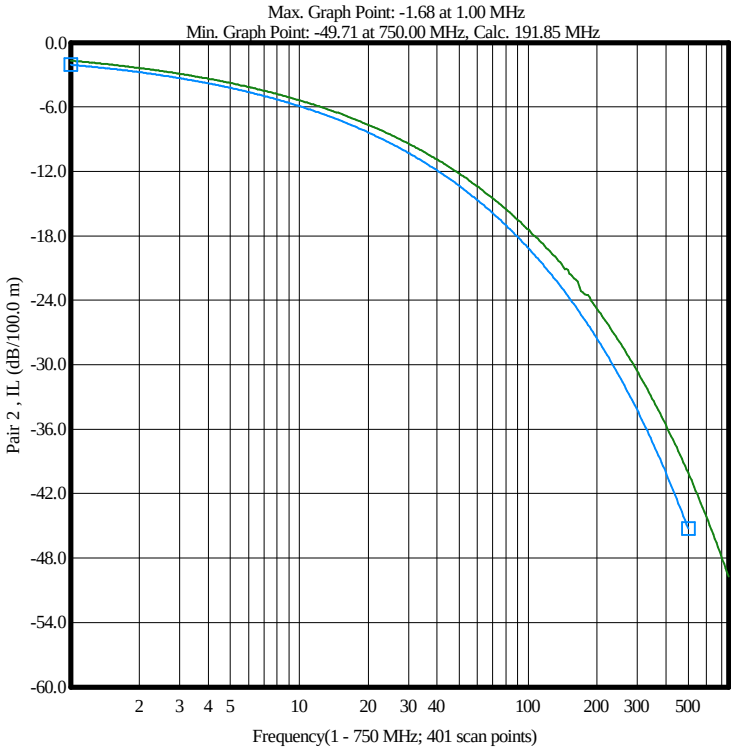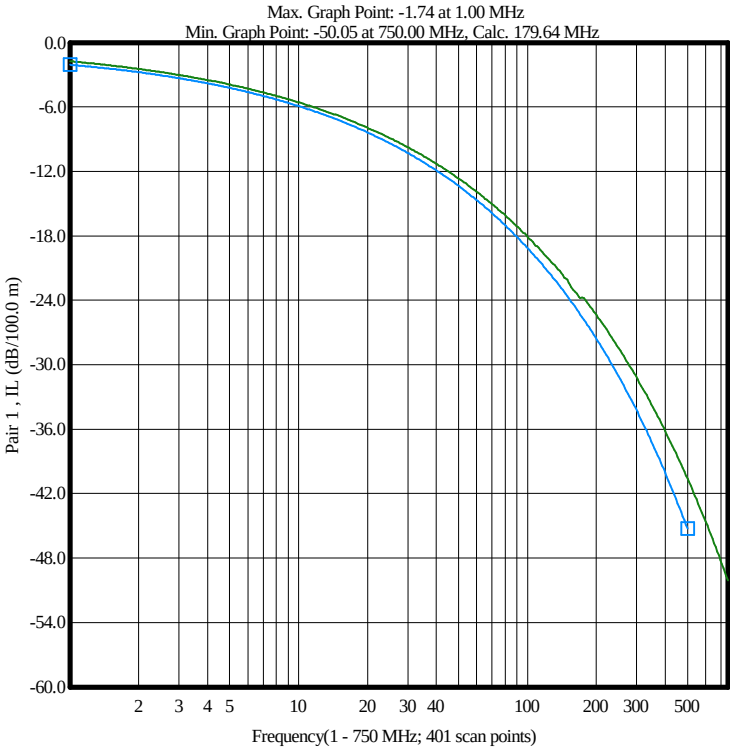

Summary and Graphic: Near End Crosstalk Loss (NEXT)





(Cat 6A): NEXT >= 44.3 - 15 *log(f/100)

Pair	Spec (Min)(dB)	Measured(dB)	Margin (dB)	@ Frequency (MHz)	Test Result
Pair 1 - 2	72.3	88.8	16.5	1.37	Passed
Pair 1 - 3	65.4	80.7	15.3	3.92	Passed
Pair 1 - 4	73.3	91.2	17.9	1.17	Passed
Pair 2 - 3	37.2	48.6	11.4	296.86	Passed
Pair 2 - 4	73.6	88.0	14.4	1.12	Passed
Pair 3 - 4	68.7	83.4	14.7	2.35	Passed

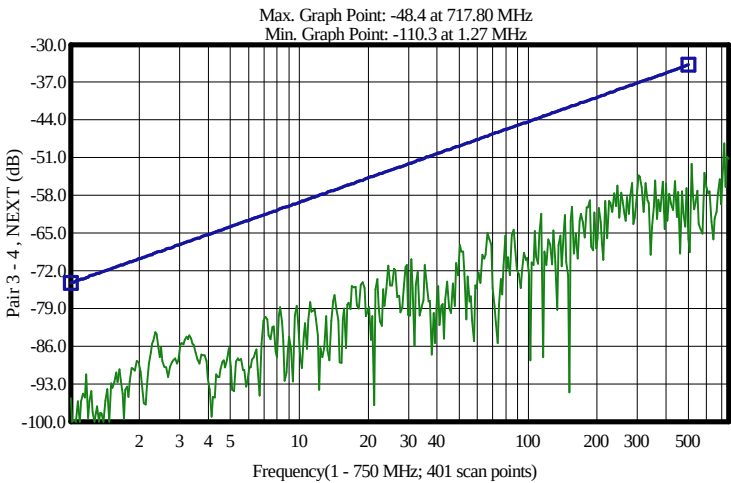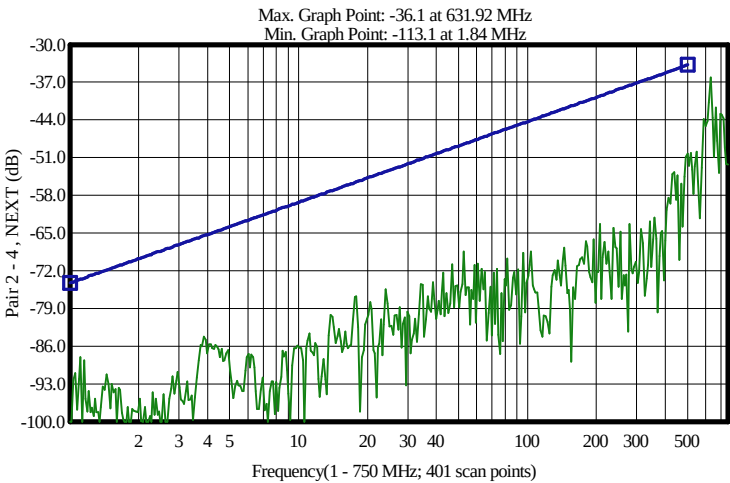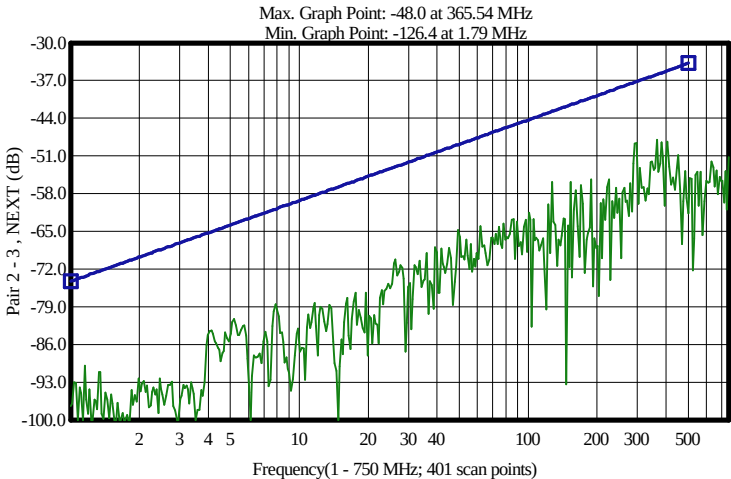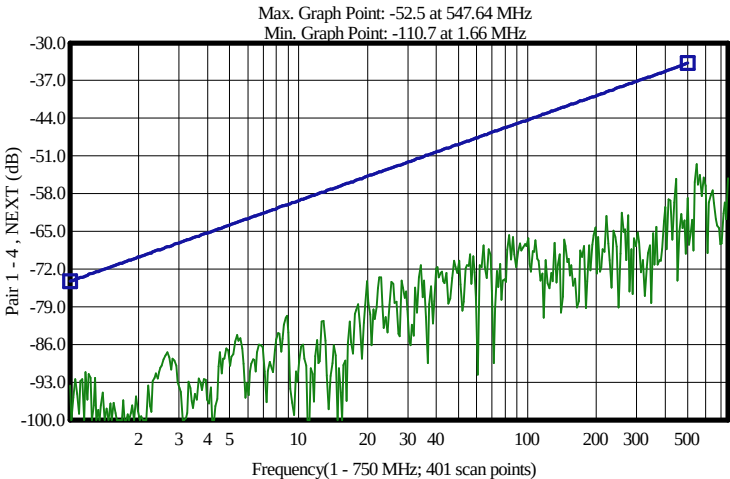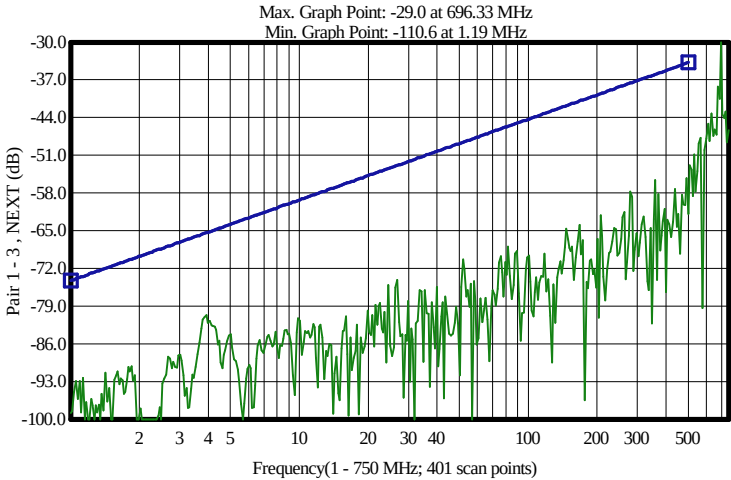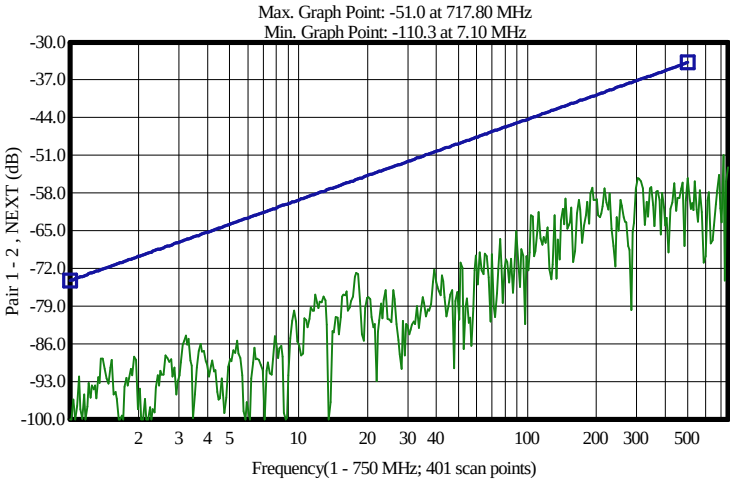

Summary and Graphic: Power Sum NEXT(PSNEXT)
(Cat 6A): PSNEXT >= 42.3 - 15 log(f/100)

Pair	Spec (Min)(dB)	Measured(dB)	Margin (dB)	@ Frequency (MHz)	Test Result
Pair 1 [5]	63.5	79.9	16.4	3.86	Passed
Pair 2 [6]	35.2	48.0	12.8	296.86	Passed
Pair 3 [7]	35.2	48.1	12.9	296.86	Passed
Pair 4 [8]	71.6	86.3	14.7	1.12	Passed

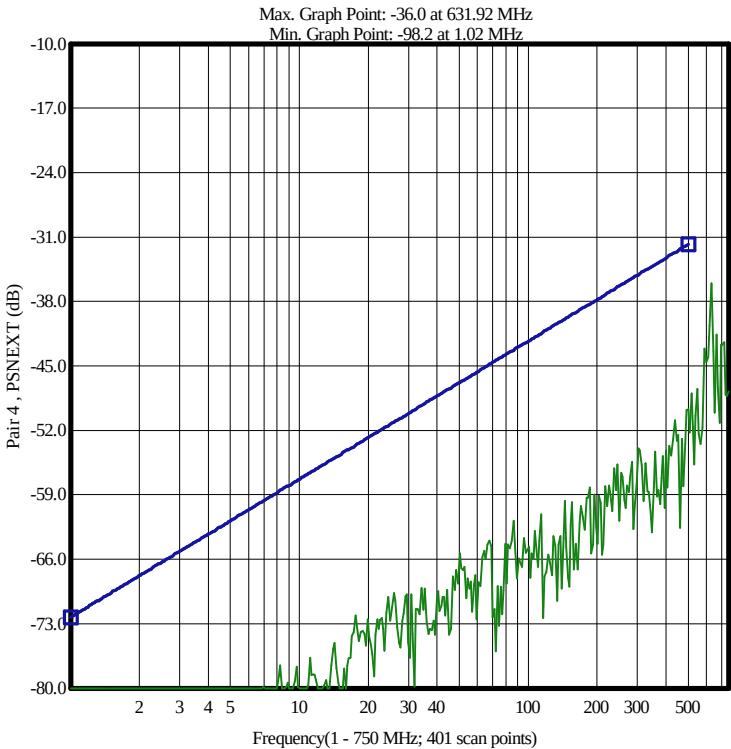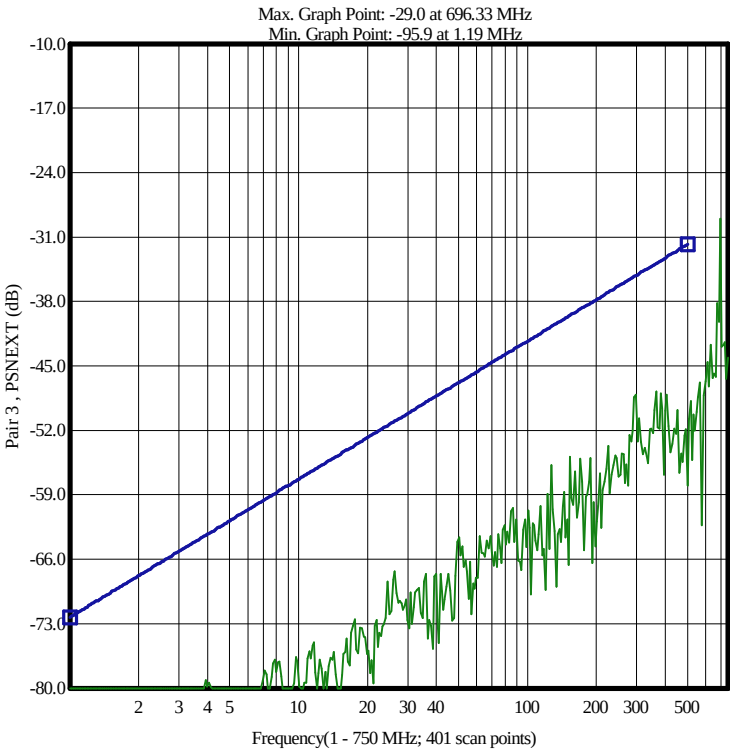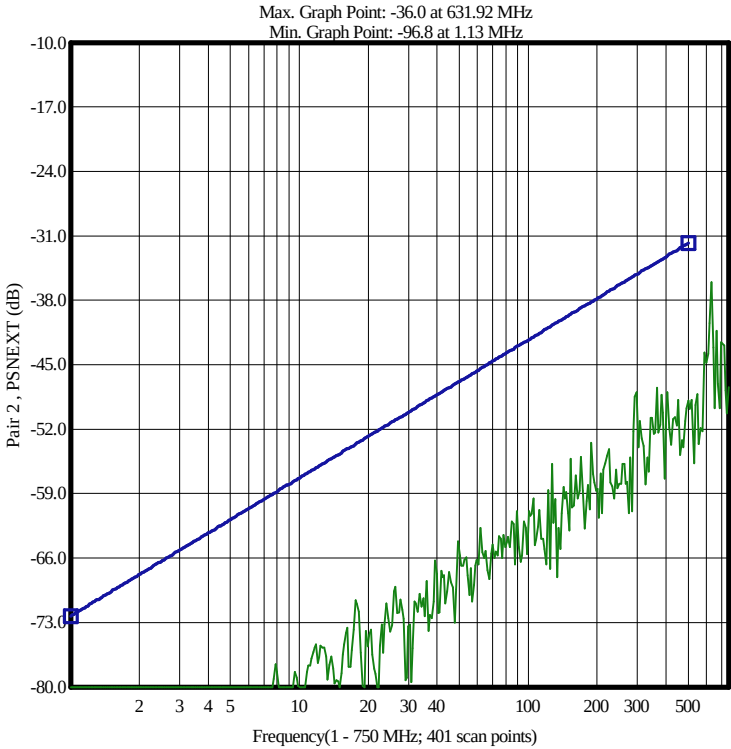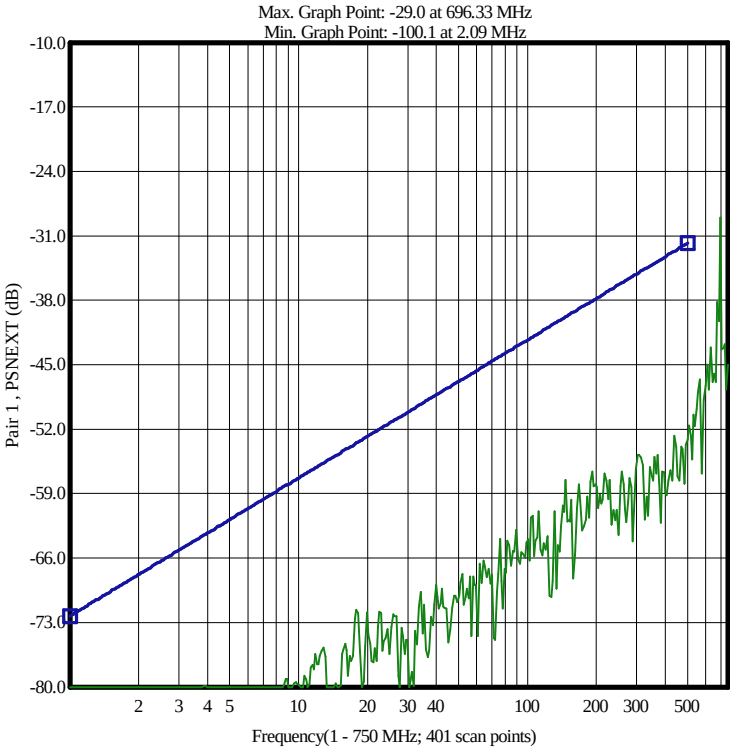

N/A = Not Applicable.
--- = Disable/Bypassed Pair.

* = Measured value out of spec.
xxx = No entry.

*** = Measured value is invalid.

NEXT SWEEP - Worst Margin (dB) (Negative sign indicates a failure.)

Dv/Rc	2	3	4
1	16.5	15.3	17.9
2	...	11.4	14.4
3	...	...	14.7

NEXT SWEEP - Worst Frequency (MHz)

Dv/Rc	2	3	4
1	1.37	3.92	1.17
2	...	297	1.12
3	...	...	2.35

Detail Discrete Frequencies ---Input Impedance (Zin)(Ohms)(Terminated)

Frequency	1.00	4.00	8.00	10.00	16.00	20.00	25.00	31.25	62.50	99.90
Max Spec	115.00	115.00	115.00	115.00	115.00	115.00	115.00	115.00	115.00	115.00
Min Spec	85.00	85.00	85.00	85.00	85.00	85.00	85.00	85.00	85.00	85.00
Pair 1 [5]	107.01	100.74	100.90	101.21	100.51	99.94	98.79	99.79	98.47	99.65
Pair 2 [6]	107.39	102.42	102.83	102.66	102.20	101.67	99.66	99.49	97.45	101.46
Pair 3 [7]	106.45	100.53	101.28	101.28	100.27	100.07	98.98	98.55	97.55	98.64
Pair 4 [8]	107.76	103.69	102.86	103.32	102.32	102.38	101.18	100.26	98.91	100.16

Continue:Input Impedance (Zin)(Ohms)(Terminated)

Frequency	100.00	125.00	155.00	199.90	200.00	250.00				
Max Spec	122.00	122.00	122.00	122.00	132.00	132.00				
Min Spec	78.00	78.00	78.00	78.00	68.00	68.00				
Pair 1 [5]	99.62	100.39	101.08	99.80	99.83	98.15				
Pair 2 [6]	101.46	99.38	101.41	100.69	100.69	99.74				
Pair 3 [7]	98.58	100.64	99.54	99.62	99.58	96.64				
Pair 4 [8]	100.25	101.56	101.62	101.12	101.13	101.06				

Detail Discrete Frequencies ---Return Loss (RL)(dB)

(Cat 6A): RL >= 20 + 5 * log(f); 25; 25 - 7 * log(f/20)

Frequency	1.00	4.00	8.00	10.00	16.00	20.00	25.00	31.25	62.50	100.00
Min Spec	20.0	23.0	24.5	25.0	25.0	25.0	24.3	23.6	21.5	20.1
Pair 1 [5]	27.9	38.0	37.4	38.7	37.1	38.2	41.8	54.0	39.9	41.2
Pair 2 [6]	28.5	34.0	35.2	37.2	36.7	37.7	50.8	50.8	37.6	42.5
Pair 3 [7]	28.7	36.4	37.4	39.9	39.3	39.6	42.3	42.5	37.0	38.0
Pair 4 [8]	28.2	32.1	34.9	35.1	36.9	37.1	43.3	48.5	43.3	47.6

Continue:Return Loss (RL)(dB)

Frequency	200.00	250.00	300.00	350.00	400.00	500.00				
Min Spec	18.0	17.3	16.8	16.3	15.9	15.2				
Pair 1 [5]	46.8	40.1	36.2	39.1	47.7	36.3				
Pair 2 [6]	38.3	44.8	44.2	42.2	35.7	34.5				
Pair 3 [7]	39.7	33.6	44.2	38.2	55.6	36.8				
Pair 4 [8]	38.7	38.7	39.4	33.6	37.5	44.8				

Detail Discrete Frequencies ---Return Loss (RL-FE)(dB)

(Cat 6A): RL >= 20 + 5 * log(f); 25; 25 - 7 * log(f/20)

Frequency	1.00	4.00	8.00	10.00	16.00	20.00	25.00	31.25	62.50	100.00
Min Spec	20.0	23.0	24.5	25.0	25.0	25.0	24.3	23.6	21.5	20.1
Pair 1 [5]	26.3	36.2	38.0	40.5	41.3	42.8	43.9	44.8	45.7	43.7
Pair 2 [6]	27.1	33.4	38.1	40.4	43.1	41.5	44.0	45.1	42.7	38.7
Pair 3 [7]	27.2	36.2	37.9	40.8	47.4	46.7	49.6	60.4	63.3	46.6
Pair 4 [8]	26.9	32.1	35.4	37.4	36.3	38.4	37.4	40.5	43.7	42.8

Continue:Return Loss (RL-FE)(dB)

Frequency	200.00	250.00	300.00	350.00	400.00	500.00				
Min Spec	18.0	17.3	16.8	16.3	15.9	15.2				
Pair 1 [5]	48.6	46.8	47.8	48.8	36.3	32.4				
Pair 2 [6]	48.0	38.2	43.6	37.0	39.7	33.3				
Pair 3 [7]	42.4	39.0	42.0	40.1	58.3	48.7				
Pair 4 [8]	43.5	37.9	38.1	37.2	42.4	42.2				

Detail Discrete Frequencies ---Insertion Loss (IL)(dB/100.0 m)(Curve Fit)@20C
(Cat 6A): IL <= 1.82 sqrt(f) + 0.0091 * f + 0.25 / sqrt(f) (Refer to manual)

Frequency	1.00	4.00	8.00	10.00	16.00	20.00	25.00	31.25	62.50	100.00
Max Spec	2.08	3.80	5.31	5.93	7.49	8.38	9.38	10.50	14.99	19.14
Pair 1 [5]	1.74	3.50	4.98	5.58	7.07	7.94	8.89	9.96	14.19	18.09
Pair 2 [6]	1.68	3.37	4.80	5.39	6.82	7.67	8.58	9.61	13.69	17.41
Pair 3 [7]	1.74	3.50	4.99	5.59	7.09	7.96	8.91	9.98	14.22	18.08
Pair 4 [8]	1.66	3.33	4.75	5.33	6.75	7.58	8.48	9.49	13.53	17.23

Continue:Insertion Loss (IL)(dB/100.0 m)(Curve Fit)@20C

Frequency	125.00	155.00	200.00	250.00	300.00	350.00	400.00	500.00		
Max Spec	21.51	24.09	27.58	31.07	34.27	37.25	40.05	45.26		
Pair 1 [5]	20.27	22.74	25.37	28.43	31.21	33.78	36.18	40.58		
Pair 2 [6]	19.49	21.68	24.80	27.85	30.63	33.21	35.62	40.07		
Pair 3 [7]	20.31	22.68	25.84	29.03	31.94	34.64	37.18	41.85		
Pair 4 [8]	19.21	21.41	24.76	27.85	30.68	33.31	35.77	40.34		

Detail Discrete Frequencies ---Near End Crosstalk Loss (NEXT)(dB)
(Cat 6A): NEXT >= 44.3 - 15 *log(f/100)

Frequency	1.00	4.00	8.00	10.00	16.00	20.00	25.00	31.25	62.50	100.00
Min Spec	74.3	65.3	60.8	59.3	56.2	54.8	53.3	51.9	47.4	44.3
Pair 1 - 2	103.4	90.0	85.8	86.0	76.9	77.5	81.6	82.7	71.1	71.4
Pair 1 - 3	98.9	82.1	86.3	81.5	81.6	81.1	86.6	84.8	80.3	69.8
Pair 1 - 4	93.7	96.3	85.2	90.6	89.7	75.7	78.3	83.0	71.5	66.8
Pair 2 - 3	97.4	84.3	79.5	85.7	78.3	85.5	75.5	78.6	66.4	64.3
Pair 2 - 4	104.6	87.1	92.7	86.1	83.5	80.7	82.3	85.3	73.9	73.5
Pair 3 - 4	95.7	92.3	88.1	84.9	85.6	79.2	74.7	74.3	71.1	71.5

Continue:Near End Crosstalk Loss (NEXT)(dB)

Frequency	200.00	250.00	300.00	400.00	500.00					
Min Spec	39.8	38.3	37.1	35.3	33.8					
Pair 1 - 2	59.2	64.9	56.2	64.1	55.6					
Pair 1 - 3	69.6	69.3	67.9	76.1	61.3					
Pair 1 - 4	70.1	78.7	66.3	60.6	59.6					
Pair 2 - 3	67.9	59.0	54.8	51.2	61.5					
Pair 2 - 4	73.9	74.7	72.6	66.3	50.4					
Pair 3 - 4	66.6	61.8	56.3	55.9	65.3					

Detail Discrete Frequencies ---Power Sum NEXT(PSNEXT)(dB)
(Cat 6A): PSNEXT >= 42.3 - 15 log(f/100)

Frequency	1.00	4.00	8.00	10.00	16.00	20.00	25.00	31.25	62.50	100.00
Min Spec	72.3	63.3	58.8	57.3	54.2	52.8	51.3	49.9	45.4	42.3
Pair 1 [5]	92.2	81.3	81.0	79.8	75.4	72.7	76.2	78.6	67.9	64.1
Pair 2 [6]	95.8	81.7	78.4	81.1	74.1	75.2	73.9	76.4	64.4	62.7
Pair 3 [7]	92.4	79.8	78.2	78.7	76.0	76.2	72.0	72.4	64.6	62.2
Pair 4 [8]	91.3	85.6	82.9	81.5	80.6	73.1	72.6	73.3	67.0	64.8

Continue:Power Sum NEXT(PSNEXT)(dB)

Frequency	200.00	250.00	300.00	400.00	500.00					
Min Spec	37.8	36.3	35.1	33.3	31.8					
Pair 1 [5]	58.2	63.4	55.5	58.8	53.1					
Pair 2 [6]	58.6	57.9	51.3	50.8	49.0					
Pair 3 [7]	62.8	56.9	50.9	49.9	57.5					
Pair 4 [8]	63.7	61.5	55.8	54.3	49.7					